

# Salt Spray Chamber - KORROX III




## Model No. - KORROX III


**Salt Spray Chamber** is a consistent tool useful for checking the corrosion resistance of surface coatings when exposed to salt laden environment. This instrument provides simulation of real time weathering conditions. PRESTO CASS cum Salt Spray Chamber is manufactured under various Test Standards ASTM B 117 and JIS Z 2371.

### Registered Design No. 244580



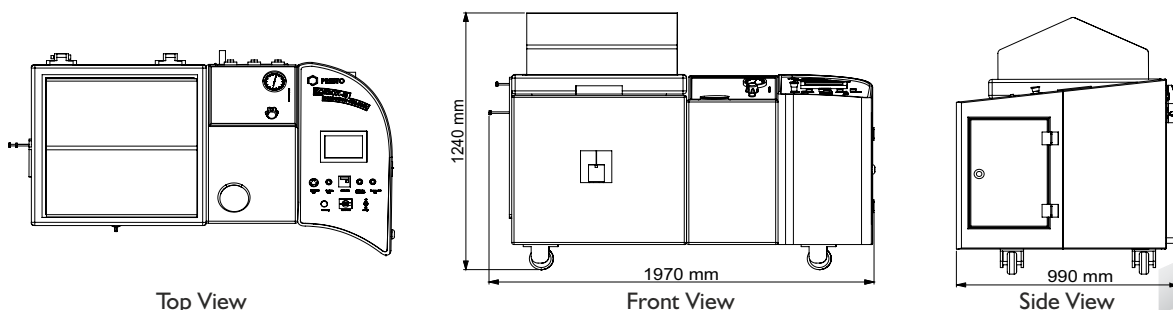




- HMI based Touchscreen Model
- Inbuilt temperature settings
- Salt Spray Test mode enabled to set parameters according to test sample
- Temperature setting and Preset Timer functions incorporated in HMI for accuracy and repeatability
- Corrosion Resistant PT-100 sensor
- Solid state digital Programmable Temperature Controller
- Program profile for selecting test parameters and performing the test.
- Easy Data Management. User can create PID settings, Air Saturator settings, test temperature, test and air purge time etc.
- Current test running status display
- Robust Construction with Fiber reinforced body(Triple wall)
- Ease of use of sample placements inside the test chamber
- Pneumatically operated canopy (only for 250 Ltr. Model)
- Air purge after test for fog settlement.
- Microprocessor based inbuilt PID controller
- Reservoir Tank inside sponge filter available
- Auto Tuning feature selection
- Run time vs temperature graph
- Data recording with temperature data reading
- USB option available (Pen drive is not a part of supply)
- Option available to set PV and SV value
- User can control PID settings through Advanced Hysteresis setting
- Angle of Canopy maintained in order to restrict flow of droplets directly on the test sample.



• Dimension for 250 liter model.



## Salt Spray Chamber with added innovative features

	<ul style="list-style-type: none"> <li>• Ethernet Connectivity- to connect with other devices using LAN and internet. Also to connect any computer or other electronic devices to its network as long as the device has an Ethernet adapter or network card.</li> </ul>
	<ul style="list-style-type: none"> <li>• Built-in VNC server that allows remote monitoring and operating of the HMI functions via VNC Client APP (Windows, iOS, Android).</li> </ul>
	<ul style="list-style-type: none"> <li>• Lock function: block remote operation during on-site operation to avoid unsynchronized commands. when the lock function is ON, VNC server allows remote monitoring but not remote operation.</li> </ul>
	<ul style="list-style-type: none"> <li>• Web Monitoring which allows direct monitoring of register data via web -page, and requires no additional software installation</li> </ul>
	<ul style="list-style-type: none"> <li>• Alarm Notification-Automatically sends out alarm notification emails to logged-in recipients when alarms occur and supports the Secure Sockets Layer (SSL) protocol to ensure safe data transmission.</li> </ul>
	<ul style="list-style-type: none"> <li>• 10 Preset Timers-TIMERS WILL TAKE CARE OF YOUR SAMPLE TIMINGS</li> </ul>
	<ul style="list-style-type: none"> <li>• Option to interchange HMI fonts between HINDI and ENGLISH for Operator convenience to operate and access database using Hindi Language.</li> </ul>



**Key Specifications:**


Display	HMI Based touchscreen 7" TFT LCD Color screen
Chamber Temp Range	Ambient to 40°C
Test Chamber Temperature Range	35°C ± 2°C
Chamber Temperature Least Count	0.1°C
Chamber Temperature Repeatability	± 2°C
Air Saturator Temperature Range	40°C - 49°C
Air Saturator Temperature Least Count	0.1°C
Air Saturator Temperature Repeatability	± 2°C
Power	220V, Single phase, 50 Hz, 15 A
pH value of Salt Solution	6.5 to 7.2 pH
Temperature Control	Inbuilt PID Temperature Controller
Timer (Hour meter)	6 digits
Test Air Pressure	0.7Kg/cm <sup>2</sup> - 1.2Kg/cm <sup>2</sup>
Air Regulator	0 to 30 psi



Check for options



\* available with only 250 liter model



**Highlights:**

Air Saturator water Level low alarm	Yes
Fog Collection Funnel	1
Air Purge	Auto/Manual
Air Saturator Auto Refilling	Yes
Material	Fiber Glass
Over Temperature Alarm	Yes
Reservoir float valve	Yes

\* Compressed Air requirement : Approx 7 cfm (Air Compressor not part of supply)  
Main air line pressure regulator with filter in customer scope.

MODEL	Internal Size : (in mm)	External Size : (in mm)
KorroX™ - 250 *	800X500X550	1970X990X1240
KorroX™ - 450	1000X700X750	2200X1150X1550
KorroX™ - 1000	1600X700X800	2750X1170X1650

**Optional:**

- Online pH meter.
- Table top pH meter.
- Humidity indicator and sensor stand alone.

Thank you customers for choosing us as your partners in growth !



\*All the above logos are the sole property of their respective owners and are used purely for depiction purposes only.

**Head Office : Presto Stantest Private Limited**

I-42, DLF Industrial Area Phase-I, Delhi Mathura Road, Faridabad 121003, Haryana, India  
P : +91 129 4272727 E : info@prestogroup.com

**Branches :**

**Mumbai**  
503-504 B, Fair link Centre, Opp. Fame Adlab, Behind Mongini's Off Link Road Andheri (West), Mumbai 400058  
P : +91 022 42957052, 42957053  
E : west@prestogroup.com

**Kolkata**  
93, 3<sup>rd</sup> Floor, Karnani Estate 209, A.J.C. Bose Road Kolkata-700017. West Bengal  
P : +91 033 40612012  
E : east@prestogroup.com

**Chennai**  
A-3, First Floor, Sri Sathya Sai Building 755, Poonamallee High Road, Kilpauk Chennai- 600 010. Tamil Nadu  
P : +91 044 43865260, 43838372  
E : south@prestogroup.com

